

Features

Standard Features	Easily Configured To Meet Your Needs	Options & Accessories
-------------------	--------------------------------------	-----------------------

Measurements

GS-2669 RT

- 9.70 m (31 ft 9 in) working height
- Up to 680 kg (1,500 lbs) lift capacity

GS-3369 RT

- 11.75 m (38 ft 6 in) working height
- Up to 454 kg (1,000 lbs) lift capacity

GS-4069 RT

- 14.12 m (46 ft 3 in) working height
- Up to 363 kg (800 lbs) lift capacity

Productivity

- Drive at full height
- Folding guardrail with full height swing gate
- Platform controls with fault indicator
- Proportional lift and drive
- AC power to platform
- Front oscillating axle
- Positive traction control
- Four-wheel braking
- Tilt level sensor with audible alarm
- Descent alarm
- Flashing LED beacons
- Horn
- Hour meter
- Hydraulic oil cooler
- Telematics-Ready Connector

Power

- All engines are emissions compliant
- Swing-out engine tray

Platform

- 2.79 x 1.60 m (9 ft 2 in x 5 ft 3 in) steel frame platform with replaceable aluminium deck
- 1.52 m (5 ft) slide-out extension deck

Outriggers

- Automatic levelling hydraulic outriggers

Engine

- Kubota diesel 24.8 hp (18.5 kw)

Drive

- 4 x 4

Axle

- Front oscillating axle

Tyre Options


- Foam-filled rough terrain (standard)
- Foam-filled, non-marking rough terrain

Productivity Options

- Air line to platform
- Power to platform plug, socket with optional Residual-current Circuit Breaker with Overcurrent protection
- Biodegradable hydraulic oil
- Track & Trace⁽²⁾ (GPS unit providing machine location & operating information)
- Motion alarm

Power Options

- AC generator (110 V / 60 Hz or 240 V/50 Hz, 3000 W)⁽¹⁾ with oil cooler
- Hydraulic generator 110 V/50 Hz or 240 V/ 50 Hz with oil cooler
- Low temperature cut-out module
- Engine heater

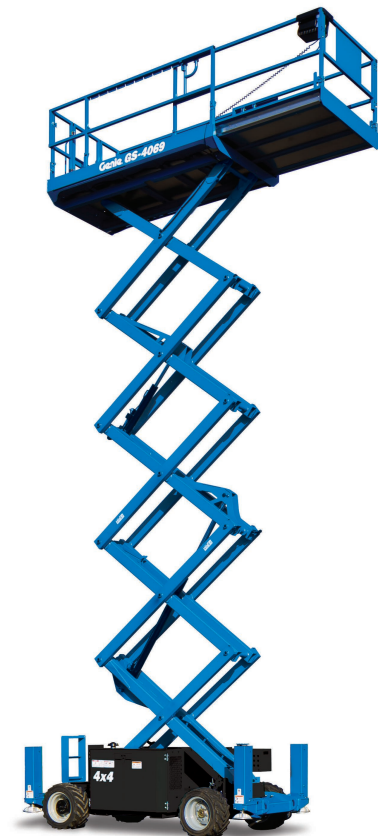

⁽¹⁾ Factory-fit option only

⁽²⁾ Includes a first 2 years subscription